MODEL NUMBER
CAMH9126

L-Band Power Amplifier

FEATURES

- L-Band Op. Freq.
- 52 dB Gain
- 61 dBm Pout
- 45% Efficiency

AMP

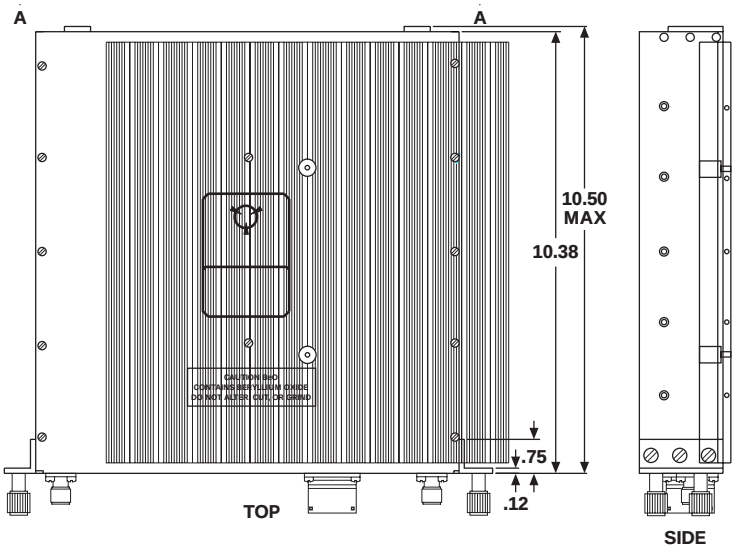

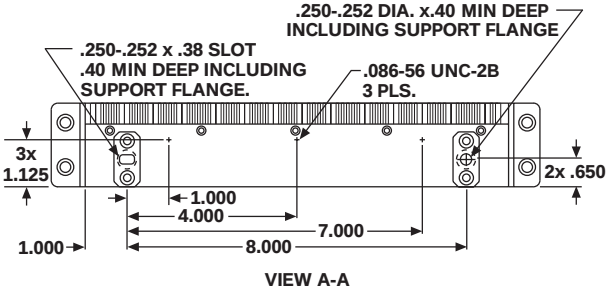

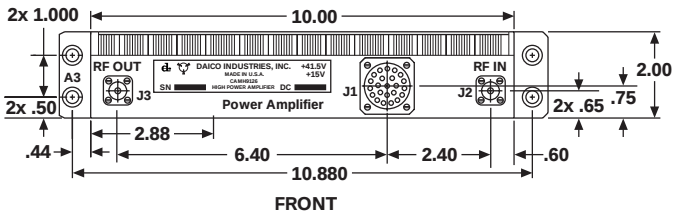

J1 Connector		
A GND (SHLD)	J N/C	T N/C
B MODIN +	K N/C	U +41.5VRT
C MODIN -	L N/C	V +41.5VRT
D N/C	M GND(SHLD)	W +41.5VRT
E PABIT +	N N/C	X +41.5V
F PABIT -	P ±15VRT	Y +41.5V
G PAOT +	R ±15VRT	Z +41.5V
H PAOT -	S +15V	

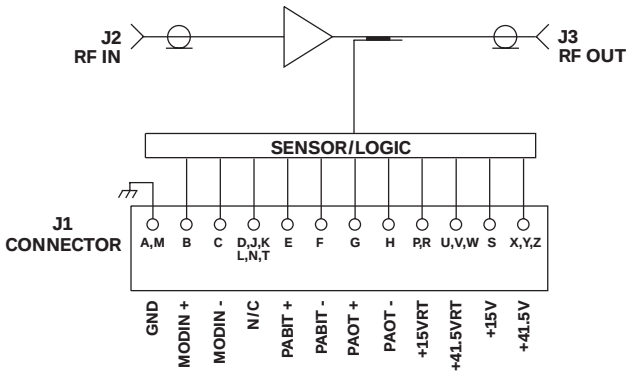

N/C = NO CONNECT

GUARANTEED PERFORMANCE

Parameter		Min	Typ	Max	Units	Conditions
Operating Frequency		1215		1400	MHz	
Gain		50	52		dB	
Peak Power Output		60	61	63	dBm	PRF 3.57 KHz PW = 15 µSec
RF Power In:	*Operate*	+7	+10	+18	dBm	
	No Damage			+20		
VSWR	In		1.4:1	1.5:1		
	Out		1.4:1	1.5:1		
Pulse Delay On		200	435	600	nSec	
Puse Delay Off		200	400	600	nSec	
Harmonics	*II*	30	35		dBc	
	III	30	38		dBc	
Impedance			50		OHMS	
Transition (Rise/Fall) Time		80	120	500	µSec	
DC Current			5.3	7.5	AMP	At +41.5 VDC
			0.45	0.7	AMP	At +15 VDC
Operating Temperature		-46	+25	+52	°C	TA