


## TYPICAL DISCRETE ASSEMBLE CYCLE

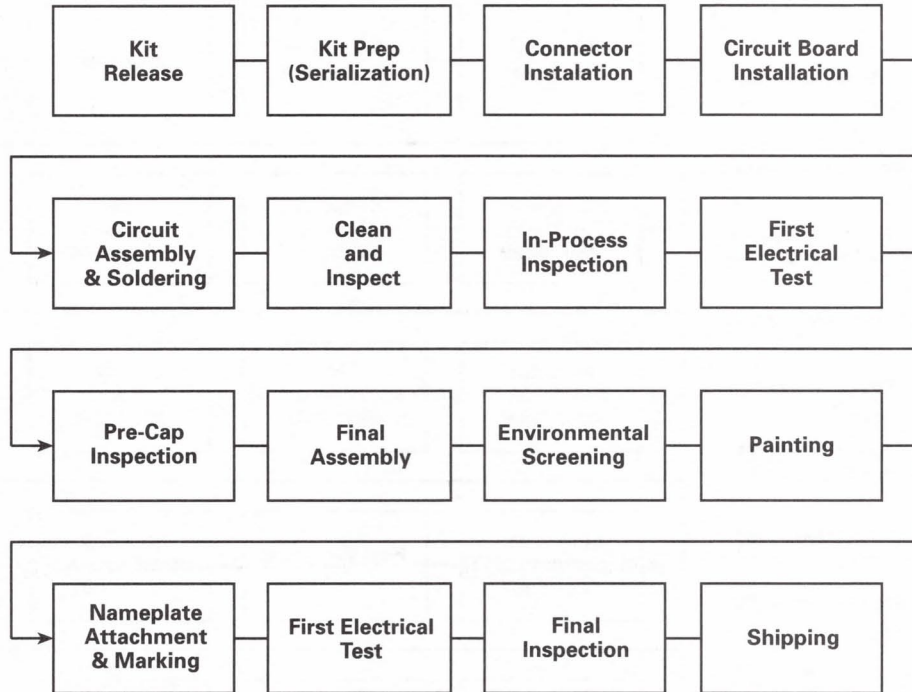

### ADDITIONAL ENVIRONMENTAL TESTING AVAILABLE

Vibration: MIL-STD-202 Method 204  
64g RMS, 1.5 hrs. each axis

Thermal Shock: Per Applicable Document