

TYPICAL MIC ASSEMBLE CYCLE

ADDITIONAL ENVIRONMENTAL TESTING AVAILABLE

Vibration: MIL-STD-202 Method 204
64g RMS, 1.5 hrs. each axis

Mechanical Shock: MIL-STD-883 Method 2002
Condition C, 3000g Y axis

Moisture Resistance: MIL-STD-883 Method 1004


Salt Atmosphere: MIL-STD-883 Method 1009

Thermal Shock: MIL-STD-883 Method 1011
Condition B, 15 cycles

Lead Integrity: MIL-STD-883 Method 2004
Condition B₂

Solderability: MIL-STD-883 Method 2003
260°C ±10°C

Resistance to Solvents: MIL-STD-883 Method 2015

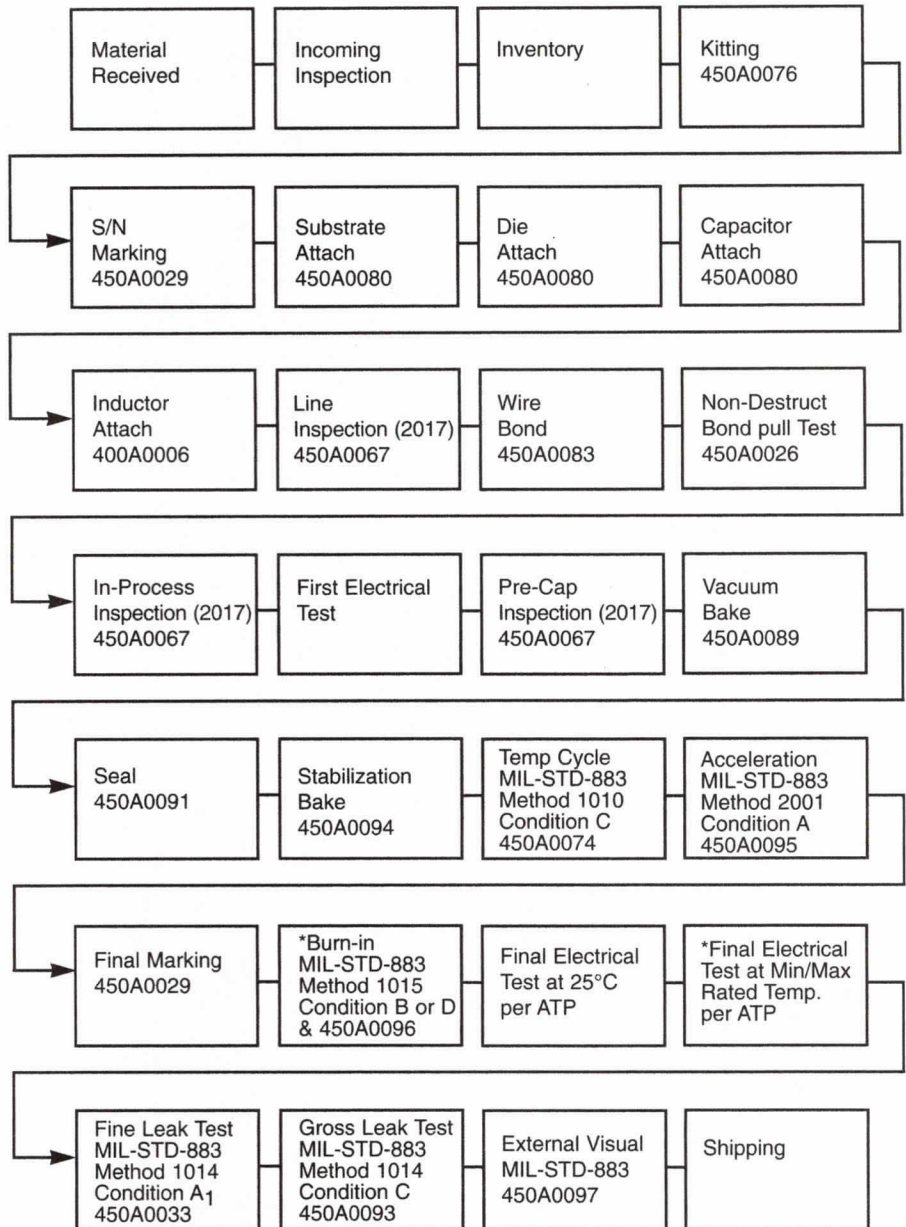

*Optional Testing